

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/007109 A1

(51) International Patent Classification⁷:

B21F 33/00

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/IB2003/002789

(22) International Filing Date: 14 July 2003 (14.07.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

UD2002A000158 15 July 2002 (15.07.2002) IT

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): BETA SYSTEMS SRL [IT/IT]; Via Vidiset, 6, I-33030 Buia (IT).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR THE AUTOMATIC FORMATION OF PACKS OF PANELS OF ELECTRO-WELDED MESH AND RELATIVE METHOD

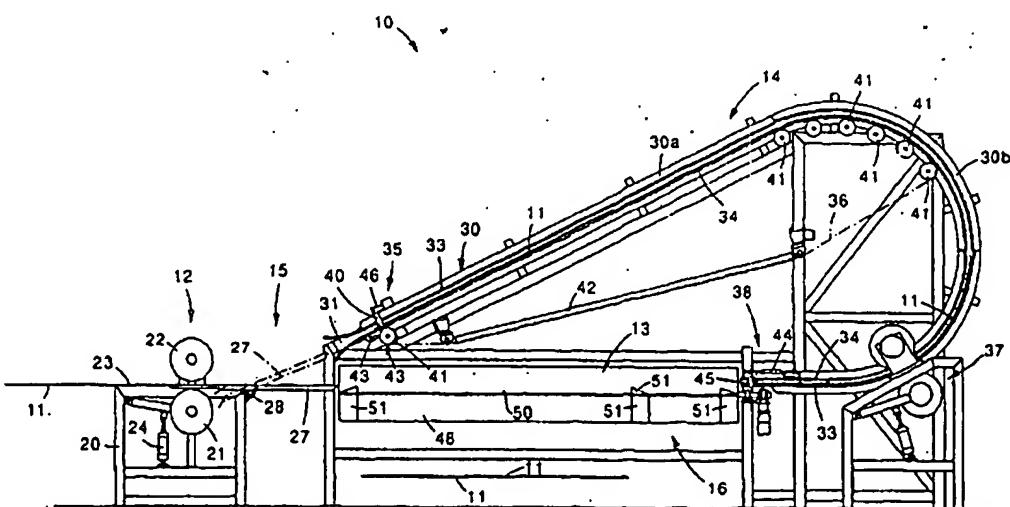

(57) Abstract: Device (10) and method for the automatic formation of packs of panels (11) of electro-welded mesh. The device (10) is arranged downstream of a production machine provided with a work plane. The device (10) is provided with an expulsion element (12) which arranges the panels (11) emerging from the machine onto an accumulation plane (13) located as an extension to the work plane of the machine, a turnover device (14) which turns over every other panel (11) with respect to the position in which it exits the machine, and a discharge device (16) to discharge the panels (11). The device (10) also comprises a switching device (15) arranged downstream of the expulsion device (12) in order to direct alternately, and substantially continuously, at least one panel (11) either directly towards the accumulation plane (13) or towards the turnover device (14).

WO 2004/007109 A1